

CHAPITRE 10 : POLLUTION CONTROL ANTI FIRE

- **BOOM**
- **SKIMMER**
- **ANALYSIS SYSTEM**
- **ATEX EQUIPEMENT**
- **FIRE TOOL**

Boom

Barrage INLAND 15

The dam INLAND 15X15 is recommended for use with a moderate wind and current, shallow water. The dam INLAND 15x22, with a skirt higher, can be used by companies sanitized treatments and intervention as it covers a wider range of uses. The dam INLAND 15X30 is used when there is wind and current significantly.

Model	15 x 30
Air draft (cm)	15
Draft (cm)	30
Heig (cm)	45
Material	Tissu JATON 745 gr/m ²
Color	Orange
Quick attach	ASTM
Lenght	15-30m

Other type of boom on demand



INLAND 10 : 10 x 15 cm

Réf 15x30 10m : AR21611

Réf 15x30 15m : AR21612

Réf 15x30 30m : AR21613

Accessories for anchor boom

Model	Reference
Leading ballast 0.75 kg	AR21641
Anchoring system on the cob, comprising: a spade anchor 12kg + 2m + 1 chain of pig20kg + control with a hook and loop + 1 buoy	AR21642
Anchor stake of 28 mm in length and 1.20m	AR21643
Masse de 3kg avec manche en fibre NOVA	AR21644
Système d'ancrage sur berge : 3 plaques + 12 piquets + 1 manille	AR21645
Extractor ord	AR21646
Magnetic anchor 200kg	AR21647
Magnetic anchor 500kg	AR21648
Magnetic anchor 1000kg	AR21649



Anchoring system



Extractor ord



Magnetic anchor



Magnetic anchor

Skimmer



Systemes écremeurs KOMARA autonomes

Les systèmes écremeurs KOMARA sont des kits complets et autonomes pour intervention d'urgence en cas de déversement d'hydrocarbures. Ils se composent d'une tête écremeur flottante (5 cm d'eau mini) + 1 groupe hydraulique DIESEL + 1 pompe + 1 kit de flexibles de raccordement. Le choix se fait essentiellement en fonction de la capacité de récupération du système.

1 - CARACTÉRISTIQUES DES TÊTES ÉCREMEURS

Référence	KOMARA7	KOMARADUO	KOMARA20	KOMARAMIDI	KOMARA40
Quantité maxi récupéré (m ³ /h)	6,4	14	23	30	52
Dimensions L x l x h (cm)	88 x 50 x 43	88 x 88 x 43	121 x 121 x 45	121 x 121 x 45	179 x 175 x 107
Poids (kg)	19	38	52	52	230
Nombre de disque oléophiles	1 x 8	2 x 8 (ou 2 brosses)	4 x 8	4 x 8	6 x 8
Vitesse de rotation des disques (rpm)	0 à 90	0 à 80	0 à 80	0 à 80	0 à 100



Tête KOMARA7



Tête KOMARA DUO



Tête KOMARA 20



Tête KOMARA MIDI



Tête KOMARA 40

For all request concern skimmer, please contact us

2 - CARACTÉRISTIQUES DES GROUPES HYDRAULIQUES

Référence	KOMARA7	KOMARADUO	KOMARA20	KOMARAMIDI	KOMARA40
Puissance moteur DIESEL (kW)	5 kW @ 3600 tr/mn	7,4 kW @ 3600 tr/mn	7,4 kW @ 3600 tr/mn	12 kW @ 3600 tr/mn	21,9 kW @ 3000 tr/mn
Dimensions L x l x h (cm)	86 x 55 x 64,5	110 x 78 x 94	110 x 78 x 94	123 x 77 x 80	136 x 80 x 106
Poids (kg)	45 + 42 (2 parties)	191	191	225	500
Capacité réservoir diesel (l)	3,5	5,5	5,5	8	80
Particularité	en 2 parties	chariot à roues	chariot à roues	chariot à roues	



Groupe KOMARA7



Groupe KOMARA DUO



Groupe KOMARA 20



Groupe KOMARA MIDI



Groupe KOMARA 40

For all request concern skimmer, please contact us

3 - CARACTÉRISTIQUES DES POMPES DE TRANSFERT

Référence	KOMARA7	KOMARADUO	KOMARA20	KOMARAMIDI	KOMARA40
Débit maxi pompe seule (m ³ /h)	10	15	42	60	60
Dimensions L x l x h (cm)	67 x 61 x 32	87,5 x 75,5 x 38	62 x 44 x 39	73 x 63 x 106	la pompe est intégrée dans le groupe hydraulique
Poids (kg)	23	32	50	100	
Particularité	flottante	flottante	-	chariot à roues	groupe hydraulique
Type de moteur	hydraulique	hydraulique	hydraulique	hydraulique	hydraulique



Pompe KOMARA7



Pompe KOMARA DUO



Pompe KOMARA 20



Pompe KOMARA MIDI



Pompe KOMARA 40

4 - CARACTÉRISTIQUES DES KITS DE FLEXIBLES HYDRAULIQUES & POMPE (avec raccords)

Référence	KOMARA7	KOMARADUO	KOMARA20	KOMARAMIDI	KOMARA40
Longueur maxi kit flexibles hydrauliques (m)	15 m - 6 flexibles	15 m - 6 flexibles	15 m - 4 flexibles	15 m - 4 flexibles	15 m - 6 flexibles
Flexible d'aspiration (Ø en " x longueur en m)	Ø 2" x 1 m	Ø 2 1/2" x 1 m	Ø 3" x 10 m	Ø 4" x 10 m	-
Flexible de refoulement (Ø en " x longueur en m)	Ø 2" x 10 m	Ø 2 1/2" x 15 m	Ø 3" x 10 m	Ø 3" x 10 m	Ø 4" x 30 m

For all request concern skimmer, please contact us

- **Analysis systems**

Pooltest 3

This professional photometer is intended for analysis of water. Regular analysis of water is essential for effective disinfection and pH control. The photometer Pooltest 3 allows the analysis of three parameters:

1. Chlore libre (DPD1) et chlore total (DPD3) : 0,01 - 5,0 mg/l
2. pH : 6,8 - 8,4
3. Acide cyanurique (stabilisant de chlore) : 2 - 200 mg/l

Caract.

- Analysis for chlorine, pH and cyanuric acid
 - Easy to use with universal symbols
 - Large screen visual
 - Filters with wavelength narrow band for better accuracy
 - Way of cell longer, increased sensitivity
 - The instrument system remembers the setting of white and zero. Opportunity also to keep 10 readings in memory
 - Rugged and waterproof, IP 67 standard
 - Optional extended range for the analysis of chlorine (0-10 mg / l)
- Spécifications techniques



Référence : AR21615

Type of instrument	Direct reading colorimeter with dual wavelength
Optiques	Palintest optical system with dual LED light. Wavelength filters with narrow band and photodetectors.
Largeur de bande du filtre	10nm
Ecran LCD	128 x 64 pixel
Temperature	0 à 50°C
Batteries	2 x 1.5V 'AA'
Size	150 x 65 x 40 mm
Weight	200g

Aquachek

Caract.

Designed for owners of pool and spa, the Digital Test Strip Reader AquaChek TruTest combines ease of use and accuracy. Simply dip a test strip in water and insert it into the test strip reader to get digital fast and accurate results in seconds.

EASY TO USE

- Fast, accurate results in 15 seconds without looking color.
- Large easy to read LCD display for viewing test results.

PRECISION

- Uses technology designed specifically for the analysis of pools and spas.



TECHNICAL INFORMATION

- Results of numerical test for chlorine / bromine reading, the pH and alkalinity total. Reporting values "low," OK "or" high "value for each test.
- Waterproof
- Memory function (records the last 9 test results.
- Power supply: 2 AA alkaline batteries (not included)

KIT INCLUDE

- Digital music player test strips TruTest
- User Guide in 15 languages
- Information processing and maintenance of swimming pools
- 25 test strips TruTest

35, ZI de l'Argile, allée C
06370 Mouans Sartoux

Tel : +33 (0)492 283 888

Fax : +33 (0)492 283 889

ECO DIST

contact@eco-dist.com

Référence : AR21614

We have partnered with a company that deals with the analysis of your fuel.
For information on an analysis of fuel thank you for contacting us.

ATEX equipment



Mobile phone



Appareils radio



Lampes portables
Projecteurs portatifs



Mini-lampes torches
Pointeurs laser




Ordinateurs de bureau,
Pockets PC, transpondeurs



Appareils de mesures,
calibrateurs



◀ Outillage anti étincelles ▶

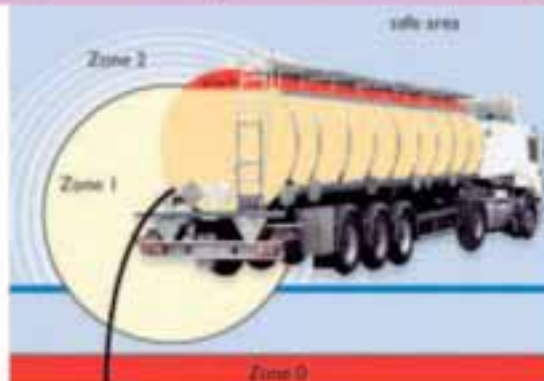

Equipements pour Sapeurs Pompiers



Lances d'incendie



Turbo-pompes gros débit



Dévidoirs à roues 200 m



Flexibles d'incendie : refoulement



Tuyaux d'incendie : aspiration

Lances MONITOR



Tête de diffusion 3000 l/min à 6 bar débits et jets réglables



Têtes de diffusion à régulation automatique de pression et jets réglables



Lances MONITOR



Embouts mousse bas foisonnement

Equipements pour l'industrie



Bouchons avec chaînettes



Coupleurs de vidange



Demi-raccords à verrou



Raccords express



Raccords à cames

Equipements pour installations fixes



Armoires d'incendie



Robinetts d'Incendie Armés (RIA)



Raccords d'alimentation



Raccords de ventilation

- **Atex mobile phone**



The Ex-Handy 07 is a high-end phone ultra-resistant, designed specifically to a u g ductivity of mobile workers and safety professionals whose jobs are among the moststringent in the world. With increased volume, the brightness of its screen and its features, you are sure to always have a particularly reliable. A mobile phone with or without belonging eil camera and two battery capacities, to offer even more flexibility.

○ VHF ATEX

Professional radio communication in hazardous areas! This is a new portable radiocommunication device specifically designed for professional use this. It offers a safe and reliable voice transmission in hazardous areas. Communicate simply and securely with your colleagues at any time, in any situation.

- programmable channel spacing
- CTCSS, DCS, 2 tone and 5 tone signaling
- Channel Scan (Scan mode)
- Blocking adjustable noise
- Time limit emission (TOT)
- Voice Operated Transmit
- Function emergency call
- device for Lone Worker Alarm (Dati)
- Fashion dead man with a position sensor.

Référence : AR21610





EcoDist

35, Z.I de l'argile, Voie C

06370 Mouans-Sartoux

Tél : +33(0)492 283 888

Fax : +33(0)492 283 889

www.eco-dist.com

E-mail : contact@eco-dist.com